



PRODUCT SPECS & MATERIALS

CANOPY TENT DATA SHEETS



DATA SHEET

5X5FT



Pack Size (L x W x H)
9.5 x 9.5 x 60"

E3 5X5FT CANOPY TENT

Equip your commercial-grade Ecotent with your option of tent fabrics and customization options. Your Ecotent Product Expert can assist with any questions, pricing, and product support.

QUICK LINKS:

[Ecotent Website](#)

[3D Tent Configurator](#)

[Tent Sizes](#)

[Photo Gallery](#)

[Technical Details](#)

[Warranties & Certificates](#)



TECHNICAL DETAILS

E3°



Frame Construction

| | |
|---------------------|------------------------|
| Frame Material | Aluminum |
| Leg Shape | Ribbed Square |
| Leg Profile | 32x41mm (2.1mm) |
| Truss Profile | 28.5x15mm (2mm) |
| Connecting Elements | Fiber Reinforced Nylon |
| Footplate Material | Anodized Aluminum |
| Push-Button Locks | ✓ Comfort Press |
| Corner Brackets | ✗ |

Weight


26.5lb (12kg)

Transport Bag

✓ Heavy-Duty PVC

Frame Height Extensions

✓ Up to 12"

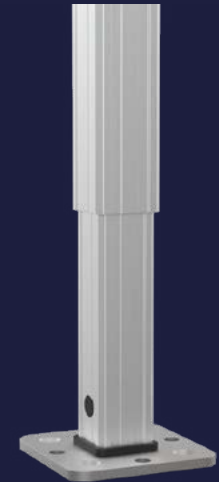

E3 TEXTILE OPTIONS


Oxford 500D, Oxford 250D, Oxford 250D NFR* & Recycled Fabric NFR*

*NFR: Non-Fire Rated. All fabrics are certified fire-retardant unless labeled as NFR.

TEXTILE PROPERTIES

| | OXFORD 500D | OXFORD 250D |
|--|--|-------------------------------------|
| Waterproof Rating (DIN EN 20811) | ✓ 2x Industry Avg. 2,000mm | ✓ 1.5x Industry Avg. 1,600mm |
| Fire Certifications B - s1, d0 (difficult to ignite) | NFPA 701, CPAI-84 Sec.6, EN 13501-1:2019, CAN/ULC-S109, CA Title 19 Sec. 1237 | |
| Color Fade Resistance (DIN EN ISO 105-B02) | Durable blue scale: 4.5-6.5 of 8 | Durable blue scale: 4.5-6.5 of 8 |
| Printing Options | ✓ Thermal & Full | ✓ Thermal & Full |

FABRIC COLORS



DATA SHEET

6.5X6.5FT



Pack Size (L x W x H)
13 x 13 x 59.8"

E3 6.5X6.5FT CANOPY TENT

Equip your commercial-grade Ecotent with your option of tent fabrics and customization options. Your Ecotent Product Expert can assist with any questions, pricing, and product support.

QUICK LINKS:


- [Ecotent Website](#)
- [Tent Sizes](#)
- [Technical Details](#)

- [3D Tent Configurator](#)
- [Photo Gallery](#)
- [Warranties & Certificates](#)



TECHNICAL DETAILS

E3°



Frame Construction

| | |
|---------------------|------------------------|
| Frame Material | Aluminum |
| Leg Shape | Ribbed Square |
| Leg Profile | 32x41mm (2.1mm) |
| Truss Profile | 28.5x15mm (2mm) |
| Connecting Elements | Fiber Reinforced Nylon |
| Footplate Material | Anodized Aluminum |
| Push-Button Locks | ✓ Comfort Press |
| Corner Brackets | ✗ |

Weight


39.7lb (18kg)

Transport Bag

✓ Heavy-Duty PVC

Frame Height Extensions

✓ Up to 12"

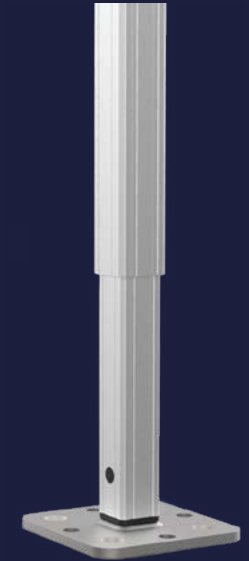


E3 TEXTILE OPTIONS

Oxford 500D, Oxford 250D, Oxford 250D NFR* & Recycled Fabric NFR*
*NFR: Non-Fire Rated. All fabrics are certified fire-retardant unless labeled as NFR.

TEXTILE PROPERTIES

| | OXFORD 500D | OXFORD 250D |
|--|---|-------------------------------------|
| Waterproof Rating (DIN EN 20811) | ✓ 2x Industry Avg. 2,000mm | ✓ 1.5x Industry Avg. 1,600mm |
| Fire Certifications B - s1, d0 (difficult to ignite) | NFPA 701, CPAI-84 Sec.6, EN 13501-1:2019, CAN/ULC-S109, CA Title 19 Sec. 1237 | |
| Color Fade Resistance (DIN EN ISO 105-B02) | Durable blue scale: 4.5-6.5 of 8 | Durable blue scale: 4.5-6.5 of 8 |
| Printing Options | ✓ Thermal & Full | ✓ Thermal & Full |

FABRIC COLORS



5X10FT



E3 5X10FT CANOPY TENT

Equip your commercial-grade Ecotent with your option of tent fabrics and customization options. Your Ecotent Product Expert can assist with any questions, pricing, and product support.


QUICK LINKS:

- [Ecotent Website](#)
- [Tent Sizes](#)
- [Technical Details](#)

- [3D Tent Configurator](#)
- [Photo Gallery](#)
- [Warranties & Certificates](#)

TECHNICAL DETAILS

E3°



Frame Construction

| | |
|---------------------|------------------------|
| Frame Material | Aluminum |
| Leg Shape | Ribbed Square |
| Leg Profile | 32x41mm (2.1mm) |
| Truss Profile | 28.5x15mm (2mm) |
| Connecting Elements | Fiber Reinforced Nylon |
| Footplate Material | Anodized Aluminum |
| Push-Button Locks | ✓ Comfort Press |
| Corner Brackets | ✗ |

Weight


34.7lb (20.1kg)

Transport Bag

✓ Heavy-Duty PVC

Frame Height Extensions

✓ Up to 12"

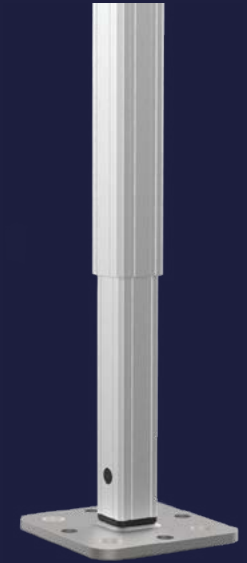

E2 TEXTILE OPTIONS


Oxford 500D, Oxford 250D, Oxford 250D NFR* & Recycled Fabric NFR*

*NFR: Non-Fire Rated. All fabrics are certified fire-retardant unless labeled as NFR.

TEXTILE PROPERTIES

| | OXFORD 500D | OXFORD 250D |
|--|---|-------------------------------------|
| Waterproof Rating (DIN EN 20811) | ✓ 2x Industry Avg. 2,000mm | ✓ 1.5x Industry Avg. 1,600mm |
| Fire Certifications B - s1, d0 (difficult to ignite) | NFPA 701, CPAI-84 Sec.6, EN 13501-1:2019, CAN/ULC-S109, CA Title 19 Sec. 1237 | |
| Color Fade Resistance (DIN EN ISO 105-B02) | Durable blue scale: 4.5-6.5 of 8 | Durable blue scale: 4.5-6.5 of 8 |
| Printing Options | ✓ Thermal & Full | ✓ Thermal & Full |

FABRIC COLORS



DATA SHEET

6.5X10FT



E3 6.5X10FT CANOPY TENT

Equip your commercial-grade Ecotent with your option of tent fabrics and customization options. Your Ecotent Product Expert can assist with any questions, pricing, and product support.

QUICK LINKS:

- [Ecotent Website](#)
- [Tent Sizes](#)
- [Technical Details](#)

- [3D Tent Configurator](#)
- [Photo Gallery](#)
- [Warranties & Certificates](#)



TECHNICAL DETAILS

E3°



Frame Construction

| | |
|---------------------|------------------------|
| Frame Material | Aluminum |
| Leg Shape | Ribbed Square |
| Leg Profile | 32x41mm (2.1mm) |
| Truss Profile | 28.5x15mm (2mm) |
| Connecting Elements | Fiber Reinforced Nylon |
| Footplate Material | Anodized Aluminum |
| Push-Button Locks | ✓ Comfort Press |
| Corner Brackets | x |

Weight

50.4lb (29.1kg)

Transport Bag

✓ Heavy-Duty PVC

Frame Height Extensions

✓ Up to 12"



E3 TEXTILE OPTIONS

Oxford 500D, Oxford 250D, Oxford 250D NFR* & Recycled Fabric NFR*
*NFR: Non-Fire Rated. All fabrics are certified fire-retardant unless labeled as NFR.

TEXTILE PROPERTIES

Waterproof Rating
(DIN EN 20811)

OXFORD 500D

✓ 2x Industry Avg.
2,000mm

OXFORD 250D

✓ 1.5x Industry Avg.
1,600mm

Fire Certifications
B - s1, d0 (difficult to ignite)

NFPA 701, CPAI-84 Sec.6, EN 13501-1:2019,
CAN/ULC-S109, CA Title 19 Sec. 1237

Color Fade Resistance
(DIN EN ISO 105-B02)

Durable
blue scale: 4.5-6.5 of 8


Durable
blue scale: 4.5-6.5 of 8

Printing Options

✓ Thermal & Full

✓ Thermal & Full

FABRIC COLORS



6.5X13FT



E1 6.5X13FT CANOPY TENT

Equip your commercial-grade Ecotent with your option of tent fabrics and customization options. Your Ecotent Product Expert can assist with any questions, pricing, and product support.

QUICK LINKS:

- [Ecotent Website](#)
- [Tent Sizes](#)
- [Technical Details](#)

- [3D Tent Configurator](#)
- [Photo Gallery](#)
- [Warranties & Certificates](#)

TECHNICAL DETAILS

E1*



Frame Construction

| | |
|---------------------|------------------------------|
| Frame Material | Aluminum |
| Leg Shape | Ribbed Square |
| Leg Profile | 46x56.5mm (2.5mm) |
| Truss Profile | 30x15mm (2.8mm) |
| Connecting Elements | Aluminum + Rubber Protectors |
| Footplate Material | Anodized Aluminum |
| Push-Button Locks | ✓ Comfort Press |
| Corner Brackets | ✓ Fixed Position |

Weight


62.3lb (28.3kg)

Transport Bag

✓ Heavy-Duty PVC

Frame Height Extensions

✓ Up to 36"

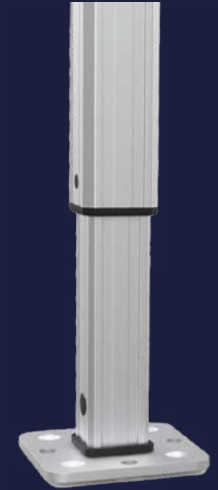


E1 TEXTILE OPTIONS

Oxford 500D, Oxford 250D, Oxford 250D NFR* & Recycled Fabric NFR*
*NFR: Non-Fire Rated. All fabrics are certified fire-retardant unless labeled as NFR.

TEXTILE PROPERTIES

| | OXFORD 500D | OXFORD 250D |
|--|--|-------------------------------------|
| Waterproof Rating (DIN EN 20811) | ✓ 2x Industry Avg. 2,000mm | ✓ 1.5x Industry Avg. 1,600mm |
| Fire Certifications B - s1, d0 (difficult to ignite) | NFPA 701, CPAI-84 Sec.6, EN 13501-1:2019, CAN/ULC-S109, CA Title 19 Sec. 1237 | |
| Color Fade Resistance (DIN EN ISO 105-B02) | Durable blue scale: 4.5-6.5 of 8 | Durable blue scale: 4.5-6.5 of 8 |
| Printing Options | ✓ Thermal & Full | ✓ Thermal & Full |

FABRIC COLORS



10X10FT



10X10FT CANOPY TENT

Equip your commercial-grade Ecotent with your option of tent fabrics and customization options. Your Ecotent Product Expert can assist with any questions, pricing, and product support.

QUICK LINKS:

[Ecotent Website](#)

[3D Tent Configurator](#)




[Tent Sizes](#)

[Photo Gallery](#)

[Technical Details](#)

[Warranties & Certificates](#)


TECHNICAL DETAILS

| | E1★  | E2"  | E3°  |
|--------------------------------|---|---|---|
| Frame Construction | | | |
| Frame Material | All-Aluminum | Aluminum & Nylon | Aluminum & Nylon |
| Leg Shape | Ribbed Square | Ribbed Square | Ribbed Square |
| Leg Profile | 46x56.5mm (2.5mm) | 43x55.5mm (2.5mm) | 32x41mm (2.1mm) |
| Truss Profile | 30x15mm (2.8mm) | 28.5x15mm (2mm) | 28.5x15mm (2mm) |
| Connecting Elements | Aluminum, Rubber Cover | Fiber Reinforced Nylon | Fiber Reinforced Nylon |
| Footplate Material | Anodized Aluminum | Anodized Aluminum | Galvanized Steel |
| Push-Button Locks | ✓ Comfort Press | ✓ Comfort Press | ✓ Comfort Press |
| Corner Brackets | ✓ Fixed Position | ✗ | ✗ |
| Weight | 70.6lb (32.1kg) | 60.7lb (27.6kg) | 50.2lb (22.8kg) |
| Transport Bag | ✓ Heavy-Duty PVC | ✓ Heavy-Duty PVC | ✓ Standard Poly |
| Frame Height Extensions | ✓ Up to 36" | ✓ Up to 12" | ✗ |

TEXTILE PROPERTIES

| | OXFORD 500D | OXFORD 250D |
|--|--|-------------------------------------|
| Waterproof Rating (DIN EN 20811) | ✓ 2x Industry Avg. 2,000mm | ✓ 1.5x Industry Avg. 1,600mm |
| Fire Certifications B - s1, d0 (difficult to ignite) | NFPA 701, CPAI-84 Sec.6, EN 13501-1:2019, CAN/ULC-S109, CA Title 19 Sec. 1237 | |
| Color Fade Resistance (DIN EN ISO 105-B02) | Durable blue scale: 4.5-6.5 of 8 | Durable blue scale: 4.5-6.5 of 8 |

FABRIC COLORS



Roof Textile Options

Oxford 500D, Oxford 250D,
Oxford 250D NFR*, PVC
& Recycled Fabric NFR*

*NFR: Non-Fire Rated. All fabrics are certified fire-retardant unless labeled as NFR.

10X15FT

Overall Peak Height
10' 9" (327cm)



Entrance Height
6' 7" (201cm)

Pack Size (L x W x H)
15.7 x 22 x 60"

10X15FT CANOPY TENT

Equip your commercial-grade Ecotent with your option of tent fabrics and customization options. Your Ecotent Product Expert can assist with any questions, pricing, and product support.

QUICK LINKS:

[Ecotent Website](#)

[3D Tent Configurator](#)

[Tent Sizes](#)

[Photo Gallery](#)

[Technical Details](#)

[Warranties & Certificates](#)

TECHNICAL DETAILS

| | E1★  | E2°  | E3°  |
|--------------------------------|---|---|---|
| Frame Construction | | | |
| Frame Material | All-Aluminum | Aluminum & Nylon | Aluminum & Nylon |
| Leg Shape | Ribbed Square | Ribbed Square | Ribbed Square |
| Leg Profile | 46x56.5mm (2.5mm) | 43x55.5mm (2.5mm) | 32x41mm (2.1mm) |
| Truss Profile | 30x15mm (2.8mm) | 28.5x15mm (2mm) | 28.5x15mm (2mm) |
| Connecting Elements | Aluminum, Rubber Cover | Fiber Reinforced Nylon | Fiber Reinforced Nylon |
| Footplate Material | Anodized Aluminum | Anodized Aluminum | Galvanized Steel |
| Push-Button Locks | ✓ Comfort Press | ✓ Comfort Press | ✓ Comfort Press |
| Corner Brackets | ✓ Fixed Position | ✗ | ✗ |
| Weight | 91lb (41.4kg) | 79lb (35.9kg) | 65.8lb (29.9kg) |
| Transport Bag | ✓ Heavy-Duty PVC | ✓ Heavy-Duty PVC | ✓ Standard Poly |
| Frame Height Extensions | ✓ Up to 36" | ✓ Up to 12" | ✗ |

TEXTILE PROPERTIES

Waterproof Rating
(DIN EN 20811)

✓ 2x Industry Avg.
2,000mm

✓ 1.5x Industry Avg.
1,600mm

Fire Certifications
B - s1, d0 (difficult to ignite)

NFPA 701, CPAI-84 Sec.6, EN 13501-1:2019,
CAN/ULC-S109, CA Title 19 Sec. 1237

Color Fade Resistance
(DIN EN ISO 105-B02)

Durable
blue scale: 4.5-6.5 of 8


Durable
blue scale: 4.5-6.5 of 8

Printing Options

✓ Thermal & Full

✓ Thermal & Full

FABRIC COLORS

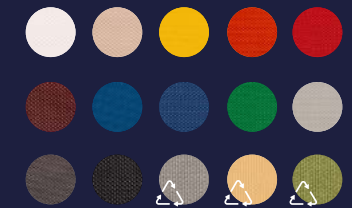

Roof Textile Options

Oxford 500D, Oxford 250D,
Oxford 250D NFR*, PVC
& Recycled Fabric NFR*

*NFR: Non-Fire Rated. All fabrics are certified fire-retardant unless labeled as NFR.

10X20FT



10X20FT CANOPY TENT

Equip your commercial-grade Ecotent with your option of tent fabrics and customization options. Your Ecotent Product Expert can assist with any questions, pricing, and product support.

QUICK LINKS:

[Ecotent Website](#)

[Tent Sizes](#)

[Technical Details](#)

[3D Tent Configurator](#)

[Photo Gallery](#)

[Warranties & Certificates](#)

| TECHNICAL DETAILS | E1★  | E2™  | E3°  |
|--------------------------------|---|---|---|
| Frame Construction | | | |
| Frame Material | All-Aluminum | Aluminum & Nylon | Aluminum & Nylon |
| Leg Shape | Ribbed Square | Ribbed Square | Ribbed Square |
| Leg Profile | 46x56.5mm (2.5mm) | 43x55.5mm (2.5mm) | 32x41mm (2.1mm) |
| Truss Profile | 30x15mm (2.8mm) | 28.5x15mm (2mm) | 28.5x15mm (2mm) |
| Connecting Elements | Aluminum, Rubber Cover | Fiber Reinforced Nylon | Fiber Reinforced Nylon |
| Footplate Material | Anodized Aluminum | Anodized Aluminum | Galvanized Steel |
| Push-Button Locks | ✓ Comfort Press | ✓ Comfort Press | ✓ Comfort Press |
| Corner Brackets | ✓ Fixed Position | ✗ | ✗ |
| Weight | 121.9lb (55.4kg) | 108.5lb (49.3kg) | 88.4lb (40.2kg) |
| Transport Bag | ✓ Heavy-Duty PVC | ✓ Heavy-Duty PVC | ✓ Standard Poly |
| Frame Height Extensions | ✓ Up to 36" | ✓ Up to 12" | ✗ |

TEXTILE PROPERTIES

Waterproof Rating
(DIN EN 20811)

✓ 2x Industry Avg.
2,000mm

✓ 1.5x Industry Avg.
1,600mm

Fire Certifications
B - s1, d0 (difficult to ignite)

NFPA 701, CPAI-84 Sec.6, EN 13501-1:2019,
CAN/ULC-S109, CA Title 19 Sec. 1237

Color Fade Resistance
(DIN EN ISO 105-B02)

Durable
blue scale: 4.5-6.5 of 8


Durable
blue scale: 4.5-6.5 of 8

Printing Options

✓ Thermal & Full

✓ Thermal & Full

FABRIC COLORS



Roof Textile Options

Oxford 500D, Oxford 250D,
Oxford 250D NFR*, PVC
& Recycled Fabric NFR*

*NFR: Non-Fire Rated. All fabrics are certified fire-retardant unless labeled as NFR.

13X13FT

Overall Peak Height
12' 9" (388cm)



Entrance Height
7' 1" (215cm)

Pack Size (L x W x H)
15.7 x 27.6 x 78"

E1 13X13FT CANOPY TENT

Equip your commercial-grade Ecotent with your option of tent fabrics and customization options. Your Ecotent Product Expert can assist with any questions, pricing, and product support.

QUICK LINKS:

[Ecotent Website](#)

[3D Tent Configurator](#)

[Tent Sizes](#)

[Photo Gallery](#)

[Technical Details](#)

[Warranties & Certificates](#)

TECHNICAL DETAILS

E1*



Frame Construction

| | |
|---------------------|------------------------------|
| Frame Material | Aluminum |
| Leg Shape | Ribbed Square |
| Leg Profile | 46x56.5mm (2.5mm) |
| Truss Profile | 30x15mm (2.8mm) |
| Connecting Elements | Aluminum + Rubber Protectors |
| Footplate Material | Anodized Aluminum |
| Push-Button Locks | ✓ Comfort Press |
| Corner Brackets | ✓ Fixed Position |

Weight


88.2lb (40.1kg)

Transport Bag

✓ Heavy-Duty PVC

Frame Height Extensions

✓ Up to 36"

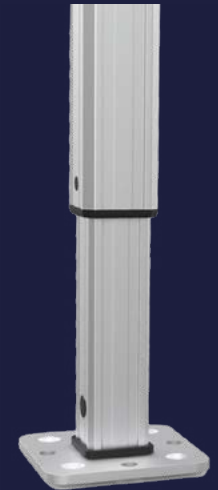

E1 TEXTILE OPTIONS


Oxford 500D, Oxford 250D, Oxford 250D NFR* & Recycled Fabric NFR*

*NFR: Non-Fire Rated. All fabrics are certified fire-retardant unless labeled as NFR.

TEXTILE PROPERTIES

| | OXFORD 500D | OXFORD 250D |
|--|---|-------------------------------------|
| Waterproof Rating (DIN EN 20811) | ✓ 2x Industry Avg. 2,000mm | ✓ 1.5x Industry Avg. 1,600mm |
| Fire Certifications B - s1, d0 (difficult to ignite) | NFPA 701, CPAI-84 Sec.6, EN 13501-1:2019, CAN/ULC-S109, CA Title 19 Sec. 1237 | |
| Color Fade Resistance (DIN EN ISO 105-B02) | Durable blue scale: 4.5-6.5 of 8 | Durable blue scale: 4.5-6.5 of 8 |
| Printing Options | ✓ Thermal & Full | ✓ Thermal & Full |

FABRIC COLORS



13X20FT



E1 13X20FT CANOPY TENT

Equip your commercial-grade Ecotent with your option of tent fabrics and customization options. Your Ecotent Product Expert can assist with any questions, pricing, and product support.

QUICK LINKS:

- [Ecotent Website](#)
- [Tent Sizes](#)
- [Technical Details](#)

- [3D Tent Configurator](#)
- [Photo Gallery](#)
- [Warranties & Certificates](#)

TECHNICAL DETAILS

E1*



Frame Construction

| | |
|---------------------|------------------------------|
| Frame Material | Aluminum |
| Leg Shape | Ribbed Square |
| Leg Profile | 46x56.5mm (2.5mm) |
| Truss Profile | 30x15mm (2.8mm) |
| Connecting Elements | Aluminum + Rubber Protectors |
| Footplate Material | Anodized Aluminum |
| Push-Button Locks | ✓ Comfort Press |
| Corner Brackets | ✓ Fixed Position |

Weight


115.7lb (52.6kg)

Transport Bag

✓ Heavy-Duty PVC

Frame Height Extensions

✓ Up to 36"

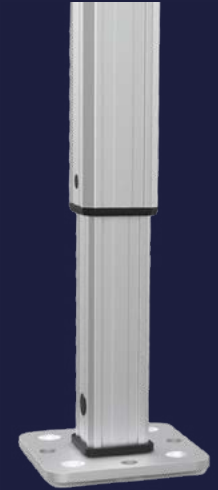

E1 TEXTILE OPTIONS


Oxford 500D, Oxford 250D, Oxford 250D NFR* & Recycled Fabric NFR*

*NFR: Non-Fire Rated. All fabrics are certified fire-retardant unless labeled as NFR.

TEXTILE PROPERTIES

| | OXFORD 500D | OXFORD 250D |
|--|---|-------------------------------------|
| Waterproof Rating (DIN EN 20811) | ✓ 2x Industry Avg. 2,000mm | ✓ 1.5x Industry Avg. 1,600mm |
| Fire Certifications B - s1, d0 (difficult to ignite) | NFPA 701, CPAI-84 Sec.6, EN 13501-1:2019, CAN/ULC-S109, CA Title 19 Sec. 1237 | |
| Color Fade Resistance (DIN EN ISO 105-B02) | Durable blue scale: 4.5-6.5 of 8 | Durable blue scale: 4.5-6.5 of 8 |
| Printing Options | ✓ Thermal & Full | ✓ Thermal & Full |

FABRIC COLORS



DATA SHEET

13X26FT

Overall Peak Height
12' 9" (388cm)



Entrance Height
7' 1" (215cm)

Pack Size (L x W x H)
15.7 x 27.6 x 78"

E1 13X26FT CANOPY TENT

Equip your commercial-grade Ecotent with your option of tent fabrics and customization options. Your Ecotent Product Expert can assist with any questions, pricing, and product support.

QUICK LINKS:

- [Ecotent Website](#)
- [Tent Sizes](#)
- [Technical Details](#)

- [3D Tent Configurator](#)
- [Photo Gallery](#)
- [Warranties & Certificates](#)



TECHNICAL DETAILS

E1*



Frame Construction

| | |
|---------------------|------------------------------|
| Frame Material | Aluminum |
| Leg Shape | Ribbed Square |
| Leg Profile | 46x56.5mm (2.5mm) |
| Truss Profile | 30x15mm (2.8mm) |
| Connecting Elements | Aluminum + Rubber Protectors |
| Footplate Material | Anodized Aluminum |
| Push-Button Locks | ✓ Comfort Press |
| Corner Brackets | ✓ Fixed Position |

Weight


155lb (70.5kg)

Transport Bag

✓ Heavy-Duty PVC

Frame Height Extensions

✓ Up to 36"

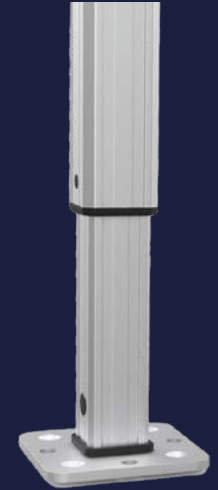

E1 TEXTILE OPTIONS

Oxford 500D, Oxford 250D, Oxford 250D NFR* & Recycled Fabric NFR*
*NFR: Non-Fire Rated. All fabrics are certified fire-retardant unless labeled as NFR.

TEXTILE PROPERTIES

| | OXFORD 500D | OXFORD 250D |
|--|---|-------------------------------------|
| Waterproof Rating (DIN EN 20811) | ✓ 2x Industry Avg. 2,000mm | ✓ 1.5x Industry Avg. 1,600mm |
| Fire Certifications B - s1, d0 (difficult to ignite) | NFPA 701, CPAI-84 Sec.6, EN 13501-1:2019, CAN/ULC-S109, CA Title 19 Sec. 1237 | |
| Color Fade Resistance (DIN EN ISO 105-B02) | Durable blue scale: 4.5-6.5 of 8 | Durable blue scale: 4.5-6.5 of 8 |
| Printing Options | ✓ Thermal & Full | ✓ Thermal & Full |

FABRIC COLORS

